

# Dig Plan 7.9m x 3m - Wall height 1.32m


All measurements are in millimeters unless otherwise stated.

## GROUND PREPARATION

**EXCAVATED PAD MUST BE LEVEL & COMPACTED TO 100 Kpa**


The preparation of the ground is a very important step in the installation of your Pool.

- Have a helper hold a tape measure or string line and mark the Pool perimeter with flour or chalk powder, or peg it out with stakes.
- Remember the bottom rail and the wall sits on natural ground not sand. It is the most important that if posts are not on natural ground that paving blocks be used to build up from the natural ground level to the base of the bottom rail, this being flush with the ground surface.
- Brickies loam is placed inside the frame work & Pool wall to cushion the liner on the base of the Pool. A thickness of 50mm to 75mm is recommended on the floor increasing to 200mm to 300mm where the floor meets the wall to create a cove. This cove is important to insure your liner fits correctly.

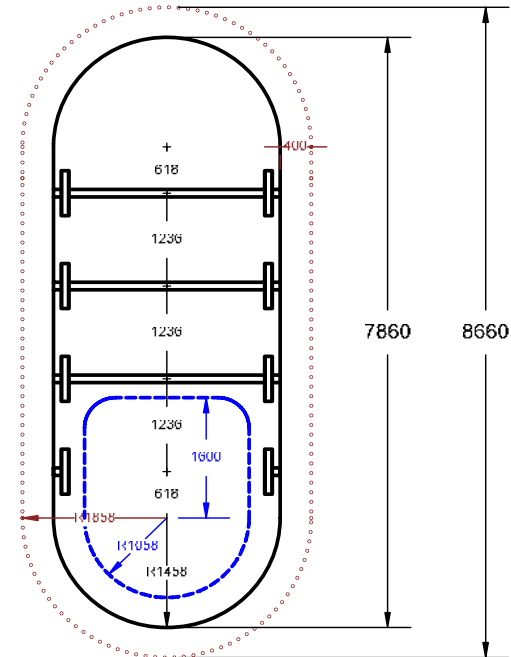


Back fill with 6 Parts Coarse Bedding Sand To 1 Part Cement.

Back fill must fall away from the Pool to avoid water buildup around edges of the Pool

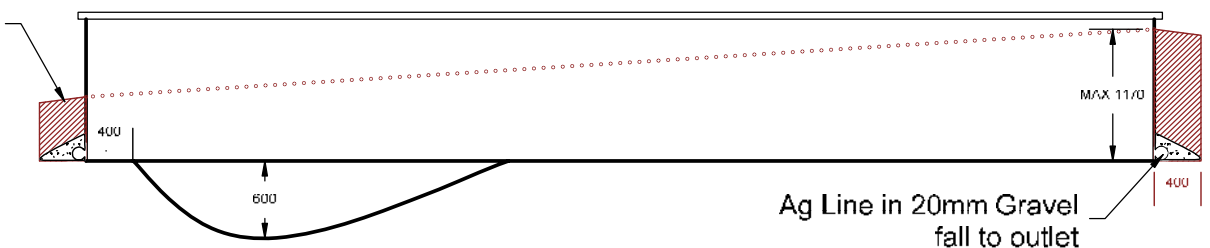

**BRICKIES LOAM REQUIRED**  
 Flat Bottom Pools 4.2 Cubic Metres  
 Deep End Pools 4.7 Cubic Metres  
 1 Bag Cement

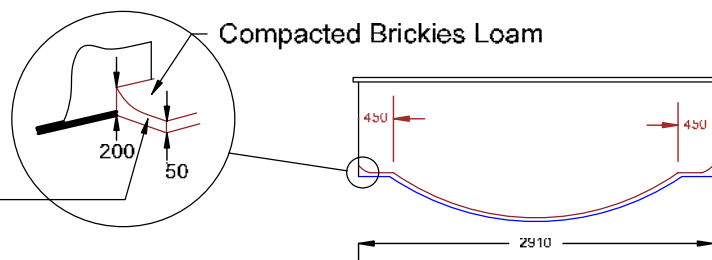

Classic Pools  
 663 Kingston road  
 Loganlea, QLD 4131  
 Australia



Warning this Pool is designed for swimming only  
 It is not intended for Diving or Jumping  
 Jumping and diving into this Pool is STRICTLY FORBIDDEN.  
 Do not locate pool near objects that would entice diving  
 i.e. garages, tree, porches, etc.  
 Do not promote horse play or other activities that would cause injuries.  
 Be sure to follow all safety rules when using any swimming pool

